




DSTiTAC


— LED —

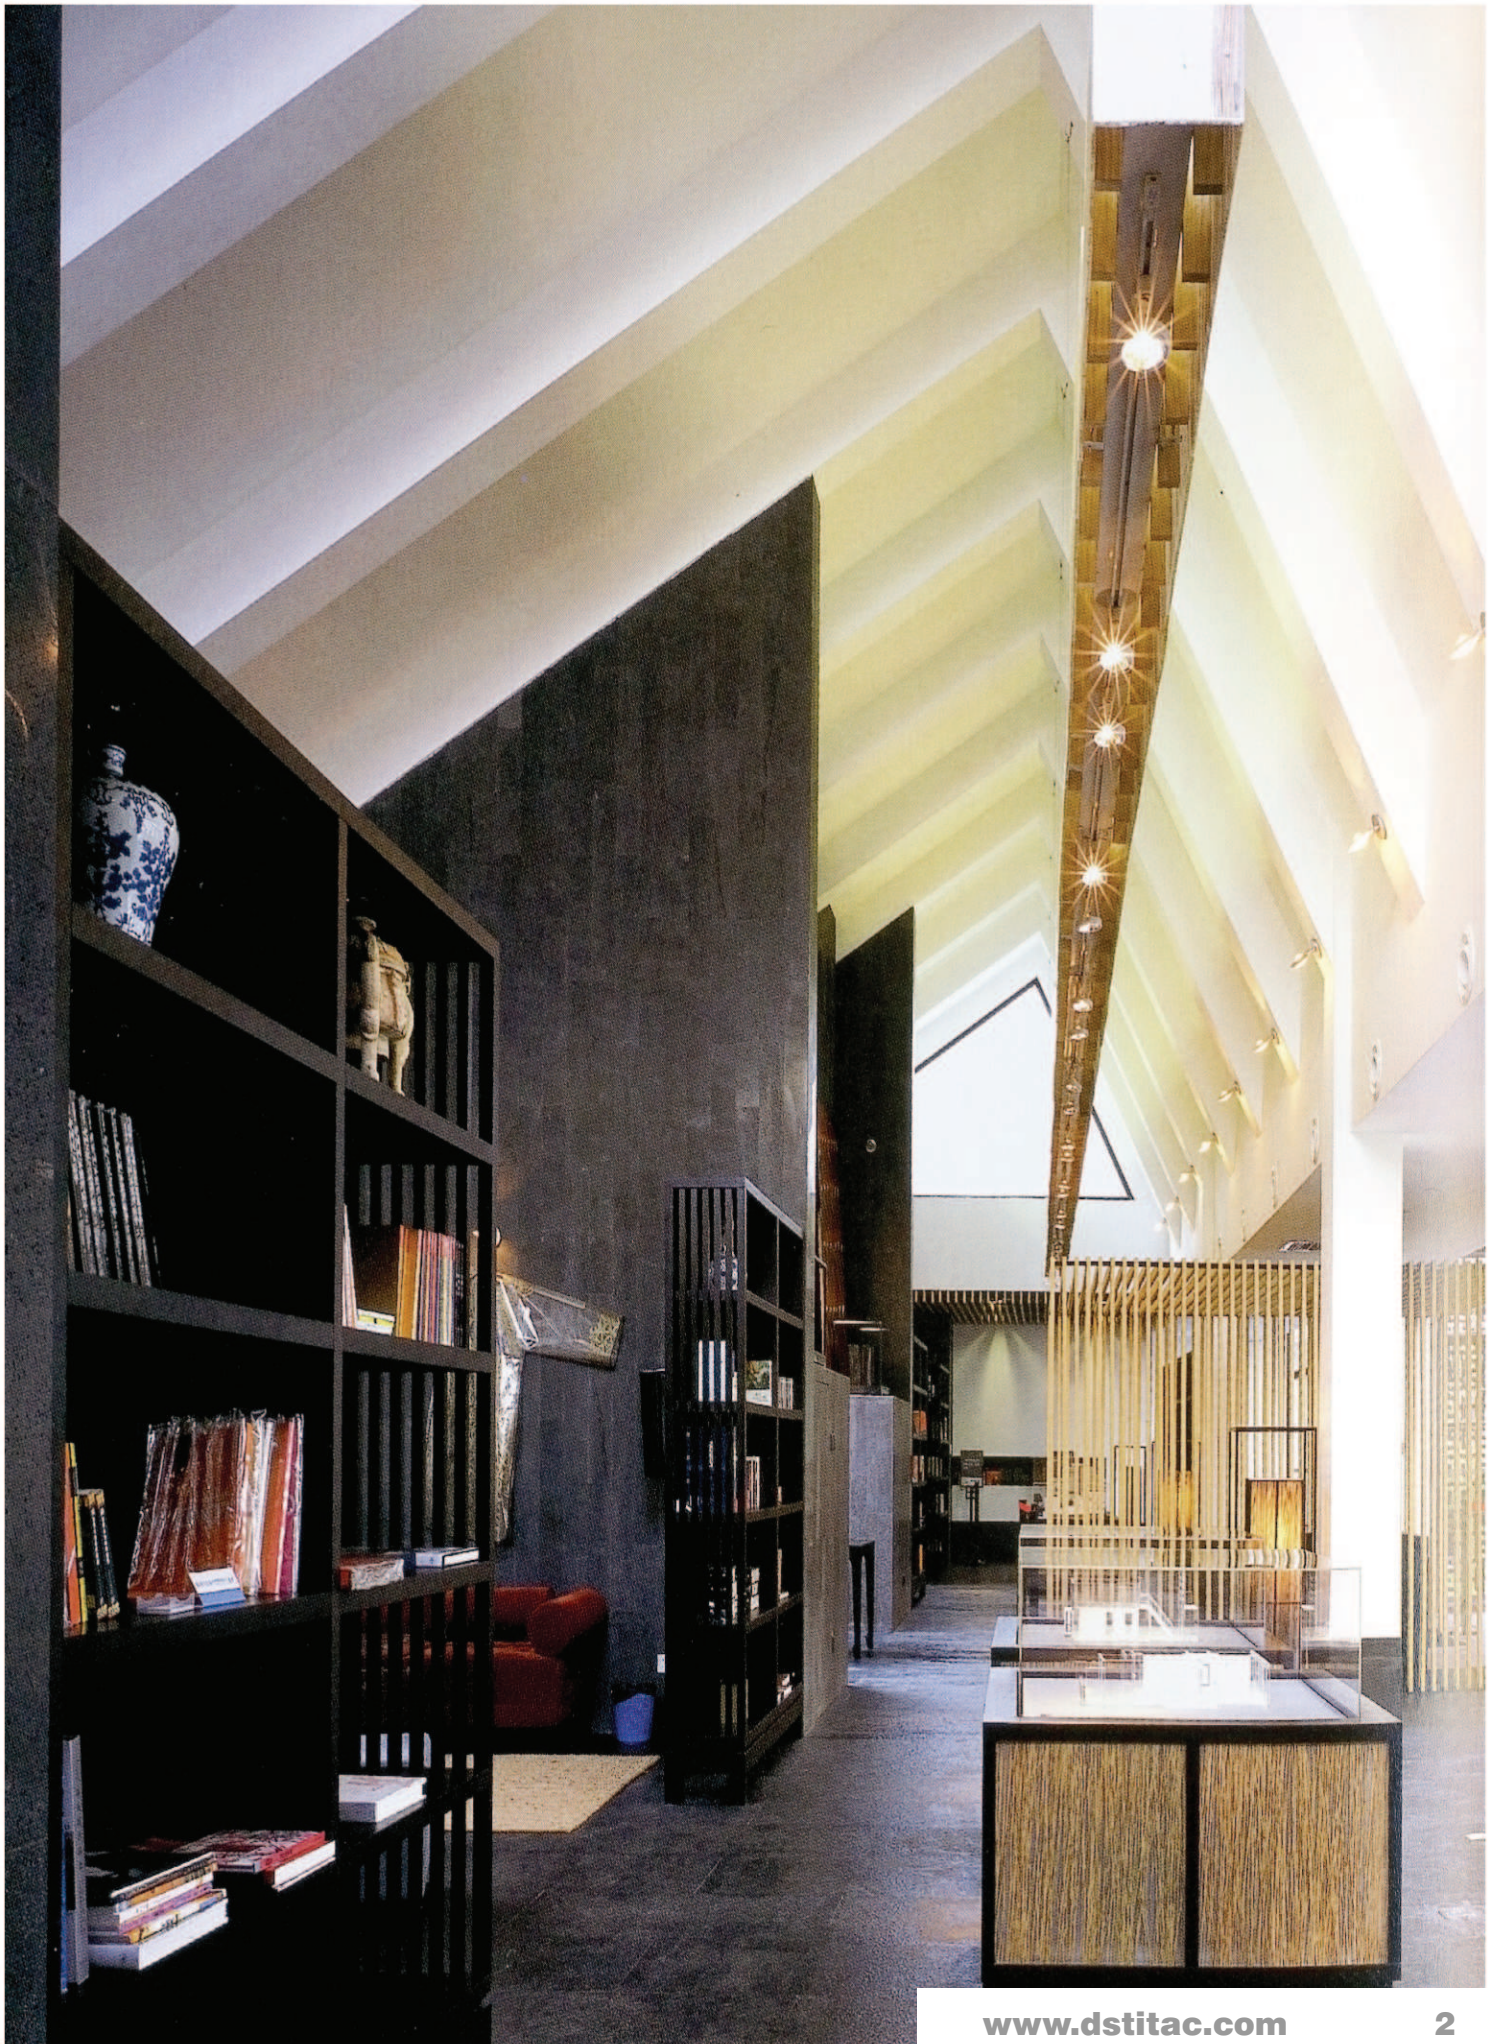

A60 Globe....




11W



Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLA60-11	11	B22/E27	2700-6500	82	900	>30000	66	122

Dimmable
HPF

7W




Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLA60-7	7	B22/E27	2700-6500	82	500	>30000	66	121.5




Dimmable

6.5W 3CCT in 1




Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLA60-6	6.5	B22/E27	2700-6500	80	300	>30000	60	110

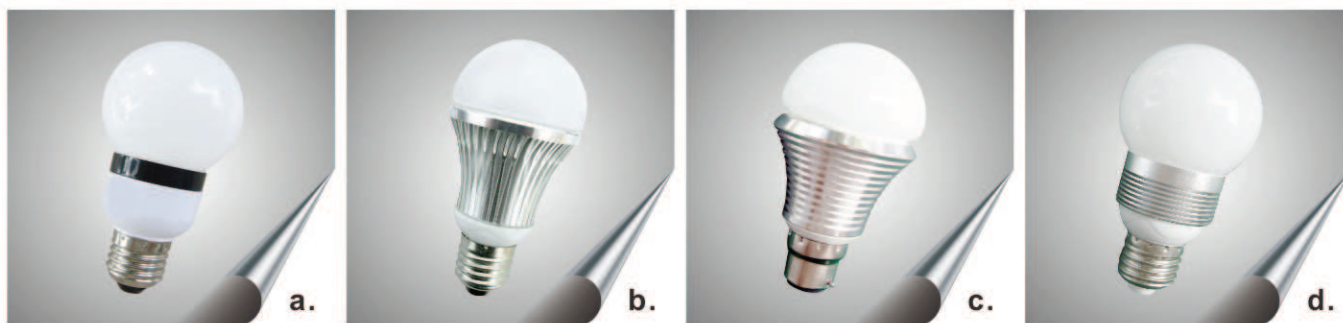

PAR30....



9W




Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLPAR30-9	9	B22/E27	2700-6500	82	500	>40000	92.5	88

PAR38....

Dimmable
HPF



15W




Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLPAR38-15	15	B22/E27	2700-6500	82	1000	>40000	119	129

GX53....



4W





Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLGX53-4	4	2700-6500	82	250	>15000	75	17

Candle....



4W



Model No.	Power (W)	Cap	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLCAN-4	4	B15/E14	2700-6500	80	120	>20000	34.5	65






GU10....




7W



Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLGU10-7	7	2700-6500	80	400	>30000	49	109




6.5W





Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLGU10-6	6.5	2700-6500	80	300	>30000	49	88



9W




Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLGU10-9	9	2700-6500	80	500	>30000	50	117



MR16....




5W With external driver



Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLMR16-5	5	2700-6500	80	350	>30000	47.7	54.5



9W With external driver




Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLMR16-9	9	2700-6500	85	500	>30000	48.5	49

MR11....



3W With external driver



Model No.	Power (W)	Color Temp. (K)	CRI (Ra)	Lumen (lm)	Lifetime (h)	D (mm)	L (mm)
TLMR11-3	3	2700-6500	80	220	>30000	33.5	46.5

DSTiTAC

DSTiTAC supplies quality product with competitive & fast services. It kknows, customer happy is its happy .

For any inquires & questions, contact lighting@dstitac.com



Sensor Lights



3W



Model No.	Power (W)	Voltage	Detection area	W (mm)	D (mm)	L (mm)
TLS-3	3	220-240V~50Hz	130° detection angle, Max.distance 8m	66	123	169



6W



Model No.	Power (W)	Voltage	Detection area	W (mm)	D (mm)	L (mm)
TLS-6	6	220-240V~50Hz	130° detection angle, Max.distance 8m	183	138	154